

# Positive Displacement Blowers

## 22 URAI


- Shaft Configurations available: Left, Right, Top, Bottom
- Detachable steel mounting feet
- Rigid one-piece cast iron casing
- Connections in standard pipe sizes
- Straight, precision machined two-lobe impellers
- Splash oil lubricated gear and drive ends
- Carburized and ground alloy steel spur timing gears
- Anti-Friction gears
- Ground steel shafts
- Center Timed for rotation in either direction



### Specs

Flow Range	to 71 CFM
Max ΔPressure	12 PSI
Max ΔVacuum	15" Hg
Maximum RPM	5275
Minimum RPM	1530
Max ΔT	225°F
Connection Size	1" FPT
Shaft Dia.	0.625"
Min Sheave Dia.	4"
Drive End Lubrication	Grease
Gear End Lubrication	Oil
Oil Sump Gear End Horiz Config	6.1 oz.
Oil Sump Gear End Vert Config	3.4 oz.
Bare Unit Weight	32 lbs.
Shipping Weight	36 lbs.
Shipping Container	Box
Box Size (L x W x H)	17" x 16" x 12"

## Roots<sup>®</sup> Blowers

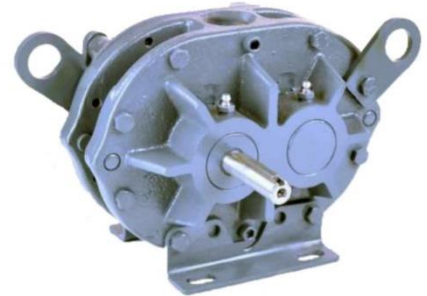

**Direct Drop-in Replacement for:**

**Sutorbilt Model 2MP**

**Tuthill Model 2002**

**Blower Packages**

**Blower Repair**

**Blower Oil and Parts**

**Sound Enclosures**

**Filters & Silencers**

**Filter Elements**

**Convey Line Components**

A logo featuring a blue globe with a grid pattern, partially obscured by a horizontal blue bar with white text.

**Global Technology & Engineering**

26426 H HWY  
EXCELSIOR SPRINGS, MO 64024  
SALES@GLOBALTECHENG.COM  
816-630-3500